



practical-0...


4 This question is about an experiment to measure the wavelength of microwaves.

A microwave transmitter **T** and a receiver **R** are arranged on a line marked on the bench.

A metal sheet **M** is placed on the marked line perpendicular to the bench surface.


Figure 1 shows side and plan views of the arrangement.

The circuit connected to **T** and the ammeter connected to **R** are only shown in the plan view.

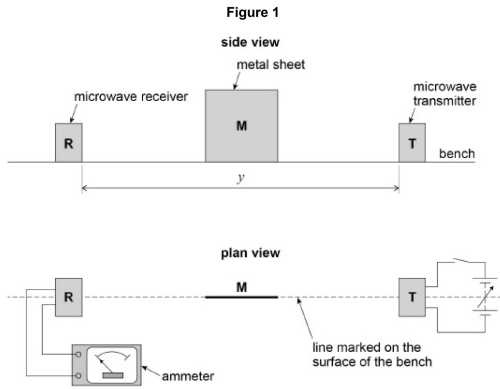


The distance y between **T** and **R** is recorded.

T is switched on and the output from **T** is adjusted so a reading is produced on the ammeter as shown in **Figure 2**.

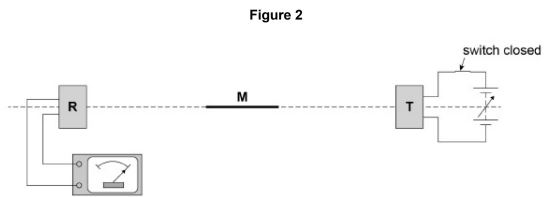

M is kept parallel to the marked line and moved slowly away as shown in Figure 3.

Figure 3



The reading decreases to a minimum reading which is not zero. The perpendicular distance x between the marked line and M is recorded.

- (a) The ammeter reading depends on the superposition of waves travelling directly to R and other waves that reach R after reflection from M.

State the phase difference between the sets of waves superposing at R when the ammeter reading is a minimum.

Give a suitable unit with your answer.

180° , π rads,

(1)

- (b) Explain why the minimum reading is not zero when the distance x is measured.

waves going straight TR do not travel as far as T-M-R. Additionally some energy may be absorbed on reflection thus reducing T-M-R amplitude even more

(1)


- (c) When M is moved further away the reading increases to a maximum then decreases to a minimum.

At the first minimum position, a student labels the minimum $n = 1$ and records the value of x .

The next minimum position is labelled $n = 2$ and the new value of x is recorded. Several positions of maxima and minima are produced.

Describe a procedure that the student could use to make sure that M is parallel to the marked line before measuring each value of x . You may wish to include a sketch with your answer.

- use graph paper. Ensure TR aligns with one line, & M on a parallel line
- or, use 2 set squares

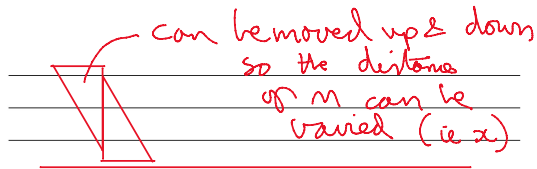

(2)

(d) It can be shown that

$$n\lambda = \sqrt{4x^2 + y^2} - y$$

where λ is the wavelength of the microwaves and y is the distance defined in **Figure 1**.

The student plots the graph shown in **Figure 4**.

The student estimates the uncertainty in each value of $\sqrt{4x^2 + y^2}$ to be 0.025 m and adds error bars to the graph.

Determine

- the maximum gradient G_{\max} of a line that passes through all the error bars
- the minimum gradient G_{\min} of a line that passes through all the error bars.

rearrange and equate to eqn of straight line: $y = mx + c$

$$G_{\max} = \frac{0.032}{0.026}$$

$$G_{\min} = \frac{0.026}{0.026}$$

(3)

(e) Determine λ using your results for G_{\max} and G_{\min} .

$n\lambda = \sqrt{4x^2 + y^2} - y$
 $\Rightarrow \lambda x + y = \sqrt{4x^2 + y^2}$
 gradient n y intercept y axis


$y_{\text{axis}} = \sqrt{4x^2 + y^2}$
 $x_{\text{axis}} = n$

\therefore gradient = λ
 so find mean of G_{\max} & G_{\min}
0.029 m

(2)

red: $\frac{\Delta y}{\Delta x} = \frac{1.585 - 1.27}{10} = 0.032$

green: $\frac{1.55 - 1.27}{10} = 0.026$

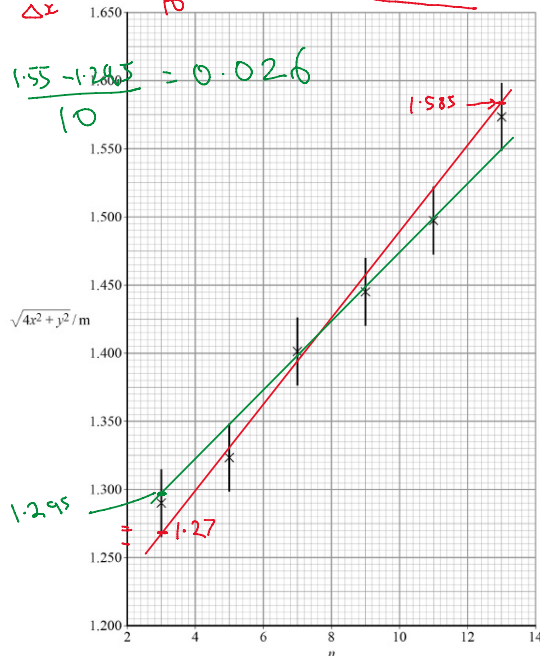

(f) Determine the percentage uncertainty in your result for λ .

using my value of 0.029

Abs uncertainty = $G_{\max} - G_{\text{mean}} = 0.032 - 0.029$

$\% = \frac{3 \times 10^{-3}}{0.029} \times 100 = 3 \times 10^{-3}$

percentage uncertainty in $\lambda = 10.3\%$

(3)

- (g) Explain how the graph in **Figure 4** can be used to obtain the value of y .
You are **not** required to determine y .

y intercept will be the value of distance y . So either do it for the mean λ or for the G_{\max} & G_{\min} lines & get an average.... or do it mathematically using $y = mx + c$

(2)

- (h) Suppose that the data for $n = 13$ had not been plotted on **Figure 4**.

Add a tick (✓) in each row of the table to identify the effect, if any, on the results you would obtain for G_{\max} , G_{\min} , λ and y .

Result	Reduced	Not affected	increased
G_{\max}		✓	
G_{\min}	✓		
λ	✓		
y			✓

(4)


(Total 18 marks)

5

This question is about the determination of the resistivity of a wire.

Figure 1 shows a micrometer screw gauge that is used to measure the diameter of the wire.

Figure 1

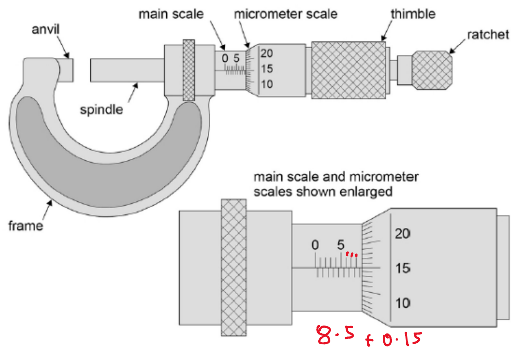

- (a) State the resolution of the **main scale** on the micrometer in **Figure 1**.

0.5 mm

resolution = _____ mm

(1)

- (b) Determine the distance between the anvil and the spindle of the micrometer in **Figure 1**. State any assumption you make.

assume no zero error
 so when the spindle
 & anvil touch it reads
 exactly zero


distance = 8.65 mm

(2)

- (c) A student must also determine the length L of the wire between clips P and Q that will be connected into a circuit.

Figure 2 shows the metre ruler being used to measure L .

Figure 2

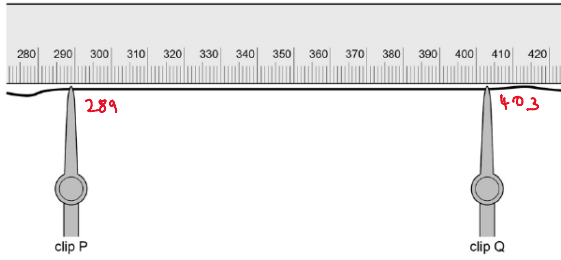

Determine L

$L =$ 114 mm

(1)

- (d) Calculate the percentage uncertainty in your result for L .

absolute uncertainty 1mm $\therefore \% = \frac{1}{114} \times 100$

percentage uncertainty = 0.88 (2%) %

(2)

- (e) State and explain what the student could have done to reduce uncertainty in the reading for L .

reduce distance of wire to scale & ensure that they look down directly onto wire

(1)

- (f) The student intends to make measurements that will allow her to determine the resistance of one metre of the wire. She uses an ohm-meter to measure the resistance R for different lengths L of the wire. The student's measurements are shown in the table below.

L/cm	R/Ω	ρ/m
81.6	8.10	$\frac{8.10}{81.6} = 8.10 = 9.93$
72.2	7.19	9.96
63.7	6.31	9.91
58.7	5.85	9.97
44.1	4.70	10.7

looks anomalous so mean of first 4

Determine the value that the student should record for the resistance per metre of the wire.
Use the additional column in the table above to show how you arrived at your answer.

resistance of one metre of wire = 9.94Ω (2)

(g) Determine the resistivity of the wire. Give a suitable unit for your answer.

mean diameter of the wire = 0.376 mm


$R = \rho \frac{L}{A} \Rightarrow \rho = \frac{RA}{L}$
 $\frac{\Omega \cdot \text{m}^2}{\text{m}} = \Omega \cdot \text{m}$

 $\rho = \frac{9.94 \times \pi (0.376 \times 10^{-3})^2}{1}$


 resistivity = 1.1×10^{-6} unit = $\Omega \cdot \text{m}$ (4)

(Total 13 marks)

6 A lens has a flat surface and a curved surface. An experiment is carried out to determine the radius R of the curved surface of the lens. The lens is placed on a rectangular glass block with its flat surface upwards. The lens is illuminated with monochromatic light reflected from a glass plate as shown in Figure 1.

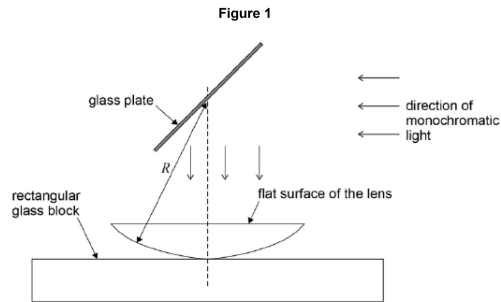


When the apparatus is viewed from above an interference pattern consisting of concentric dark and bright rings is seen. A travelling microscope positioned as shown in Figure 2 is used to measure the diameter of the bright rings.

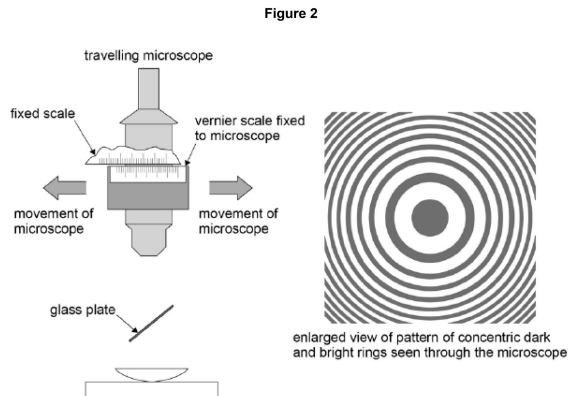

- (a) A student chose a particular bright ring (not at the centre of the pattern) and measured its diameter. He called this ring number 0. Counting outwards from the centre, he measured the diameter of every tenth ring.

Below is a graph of ring number b against ring diameter d .

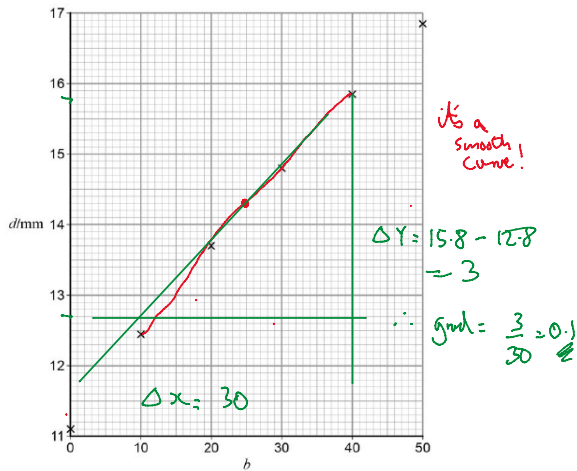

Draw a line of best fit on the graph above.

(1)

- (b) Determine the gradient G corresponding to $b = 25$.

Handwritten notes:

- Give working on my laptop
- $G = 0.11$
- mark scheme value, so I wasn't that bad!
- $G = \underline{\hspace{2cm}}$

(3)

- (c) The radius of curvature R of the lens can be calculated using any point on the graph together with the formula

$$R = \frac{Gd}{2\lambda}$$

where $\lambda = 589.3 \text{ nm}$.

Determine R .

Handwritten calculations:

- $d = 14.3 \text{ mm}$
- $G = 0.11 \text{ mm}$
- $R = \frac{0.11 \times 10^{-3} \times 14.3 \times 10^{-3}}{2 \times 589.3 \times 10^{-9}} = 1.33 \text{ m}$
- again, like rough... mark scheme was 1.36 \rightarrow 1.38 m
- $R = \underline{\hspace{2cm}} \text{ m}$


(3)

(Total 7 marks)

8

A temperature sensor is connected to a data logger to monitor how the temperature θ of a fixed mass of recently-boiled water varies with time t , over an interval of 600 s. These data are processed to produce the graph shown in Figure 1.

Figure 1

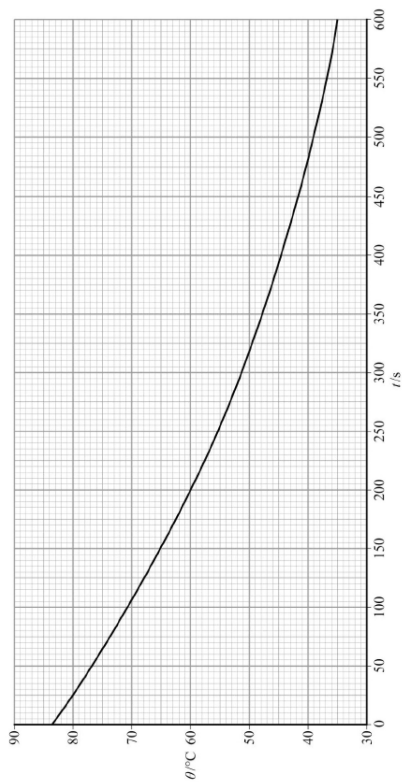

- (a) Determine the temperature θ_1 of the water when t is 190 s.

$$\theta_1 = \text{_____ } ^\circ\text{C}$$

(1)

- (b) Determine the gradient G_1 of the graph at t is 190 s.

$$G_1 \text{ _____}$$

(3)

- (c) When $t = 370$ s the temperature $\theta_2 = 46.6$ $^\circ\text{C}$ and the gradient $G_2 = -0.0645$.

The room temperature θ_R is given by $\frac{G_1\theta_2 - G_2\theta_1}{G_1 - G_2}$

Evaluate θ_R .

$$\theta_R = \text{_____ } ^\circ\text{C}$$

(1)


- (d) It can be shown that when a hot object at a temperature θ is allowed to cool in a draught, the rate at which the temperature decreases is directly proportional to the temperature difference $(\theta - \theta_R)$ between the object and the surroundings.

A student realises that $(\theta - \theta_R)$ will decrease exponentially with time and designs an experiment in which two temperature sensors are connected to a data logger.

- Sensor 1 is placed in a beaker of recently-boiled water.
- Sensor 2 measures the air temperature in the room.
- The data logger is programmed to record the output from the sensors as the water cools for 600 s.

The output data from the sensors are processed to produce the graph shown in **Figure 2**.

Figure 2

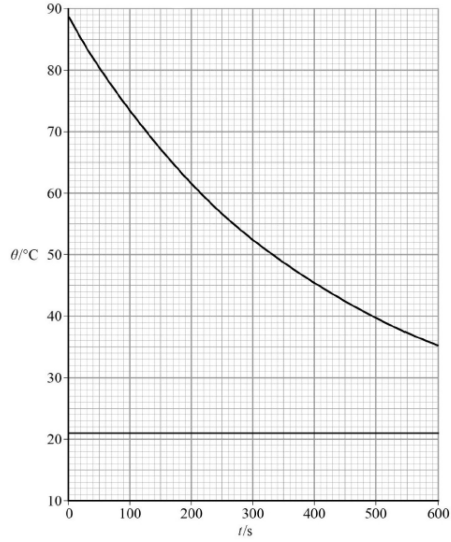

$(\theta - \theta_R)$ will decrease exponentially in the same way that the potential difference (pd) across a discharging capacitor decreases with time.

When a capacitor discharges, the pd across the capacitor falls to $\frac{1}{e}$ of an initial value in a time called the **time constant**. Electronic engineers assume that a capacitor becomes fully discharged in a time equal to **5 time constants**.

Estimate the time taken for the water to cool down to room temperature.

time taken = _____ s

(4)

